


Product Feature:

- IEEE 802.3af /at power on up to 8 ports
- Supply power to wireless access points and surveillance cameras over Cat-5 or Cat-6 cabling
- 10*10/100 Mbps Ports with AutoUplink™
- Supports PoE power 15.4W up to for each PoE port, Max power up to 30W
- Supports PoE power up to 150W for all PoE ports
- Supports PoE IEEE 802.3af/at compliant PDs
- Supports IEEE 802.3x flow control for Full-duplex Mode and back pressure for Half-duplex Mode
- 1K entry MAC address table of the PoE Switch with auto-learning and auto-aging
- LED indicators for monitoring power, link
- Support Extend 250meters

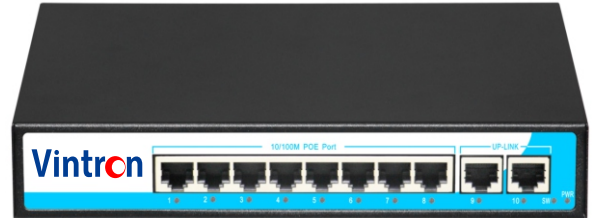

Model	VIN-POE-82N
Product Name	10-Ports AF PoE Switch with 8 PoE Ports and 2 Uplink
Connector Type	10x 10/100M copper cable RJ45 ports(8 PoE ports+2 Uplink)
Network Media	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or more UTP (≤100 meter)
Bandwidth	2Gbps (non-blocking)
Address Database Size	1K
MTBF	190,000 hours (about 21 years)
Forwarding Mode	Store-And-Forward
Network Protocols	IEEE 802.3i 10BASET; IEEE 802.3u 100BASETX; IEEE 802.3x Flow Control; IEEE 802.1af DTE Power via MDI; IEEE 802.3af/at
LED Display	System: power supply; Every Port: connecting, PoE working status
Power Supply	Power input: AC100-240V 50/60Hz; (every country use a custom power plug)
PoE Ports	Port 1-8 support POE
PoE Port Power	15.4 for each POE port, Max up to 30W
PoE Standard	IEEE 802.3af/at
Led indicator	Green: Ethernet, Red: PoE, SW: On: VLAN, 100meters/ Flashing: VLAN,250meters / Off: VLAN Closed, 100meters / Flashing: VLAN Closed, 250meters
Working Environment	Operating Temperature: -20° ~ 55 ° C; Storage Temperature: -40 ° ~ 85 ° C; Operating Humidity: 10% ~ 95%, non-condensing
Certification	CE Mark ,commercial; CE/LVD EN60950, RoHS
Radiation	CE mark, commercial; FCC Part 15 Class B; VCCI Class B; EN 55022 (CISPR 22), Class B
Transmission Distance	Data transmission distance: 100m, 250m(when on 10M data rate with Cat6.)
Warranty	2 year warranty